

Dalang

DL20U9A





**Dalang Communication
Technology Co., Ltd
Product specification sheet**

| | |
|-----------------|------------|
| Product Name: | GMOUSE |
| Product model: | DL20U9A |
| Version number: | V 1.0 |
| Revision Date: | 2024.08.02 |

Confidentiality Statement

This document and the information contained therein are the property of [Dalang Communication Technology Co., Ltd.] and are only intended for authorized persons to use for specific purposes. This document contains confidential information. Without the explicit written permission of Dalang Communication Technology Co., Ltd., no individual or group may copy, distribute, disseminate, display or disclose this document and any part thereof to any third party in any form. The recipient shall strictly abide by confidentiality obligations, protect the information in the document from being leaked or abused, and ensure that all relevant personnel comply with the same confidentiality regulations. Individuals or organizations who violate this statement will face legal action and/or contractual penalties.

Thank you for your support and cooperation in protecting the confidential information of Dalang Communication Technology Co., Ltd.

Catalogue

| | |
|---------------------------------------|---|
| 1 Product application scenarios | 1 |
| 2 Function | 2 |
| 3 Structural characteristics | 3 |
| 4 Specification parameters | 4 |
| 5 Product physical picture | 6 |

Shenzhen Dalang Communication Technology Co., Ltd

1 Product application scenarios

The DL20U9A module integrates advanced u-bloxUBX-M9140 modules and is equipped with high-performance ceramic antennas that can simultaneously track satellite signals from up to four GNSS constellations, ensuring precise positioning even in challenging environments such as complex urban canyons. This receiver performs excellently in distinguishing positioning signals from environmental noise, and can effectively capture positioning data even under weak satellite signal conditions. This module can be used for automotive and industrial tracking applications, such as navigation, remote information processing, and drones. Refer to Figure 1 for details.



Figure 1 Product Application Scenarios

2 Function

In this chapter, we will delve into and elaborate on the functions and working principles of DL20U9A, detailing how it plays a key role in different applications, as follows:

1. progressiveness technology: The module is designed based on UBX-M9140 series products, which can ensure stable and high-precision positioning performance even in extreme environments. This is thanks to its highly optimized receiver design and advanced signal processing algorithms, which enable the module to provide accurate positioning services even in urban canyons, forest coverage, and high interference areas.

2. Four mode joint solution: Supports the joint solution of Beidou, GPS, Galileo, and GLONASS, demonstrating excellent compatibility with global positioning systems and fast, reliable initialization capabilities. This multimodal fusion technology ensures seamless positioning in any location and under any environmental conditions worldwide.

3.25Hz data output rate: This module has a high data output rate of 25Hz, demonstrating its high-performance processing capability, which can quickly respond and adapt to dynamically changing environments. This feature makes the module particularly suitable for applications such as drones that require rapid positioning updates, providing powerful support for dynamic control and navigation.

4. Compatibility: Fully compatible with popular automatic flight control systems in the market such as Pixhawk and APM, providing extensive application flexibility and integration convenience. This high level of compatibility ensures that it can be seamlessly integrated into multiple drone systems, accelerating product development and deployment.

5. Ceramic antenna: The built-in 18*18 * 4 dual polarized ceramic antenna has the advantages of light weight, high gain, high precision, and strong anti-interference ability. This carefully designed antenna combination improves signal reception quality and ensures positioning accuracy in changing environments.

6. Industrial noise reduction: Adopting industrial grade low-noise RF circuit design, it enhances the ability to resist multipath interference and ensures clear signal acquisition even in high noise environments. This industrial grade noise reduction technology provides excellent signal clarity and stability for the module.

3 Structural characteristics

In this chapter, we will delve into the design details of the product and present its appearance characteristics and precise interface definitions through detailed structural diagrams. This perspective aims to provide a comprehensive framework to deepen the understanding and cognition of product structure. Refer to Figure 2 and Table 1 for details.

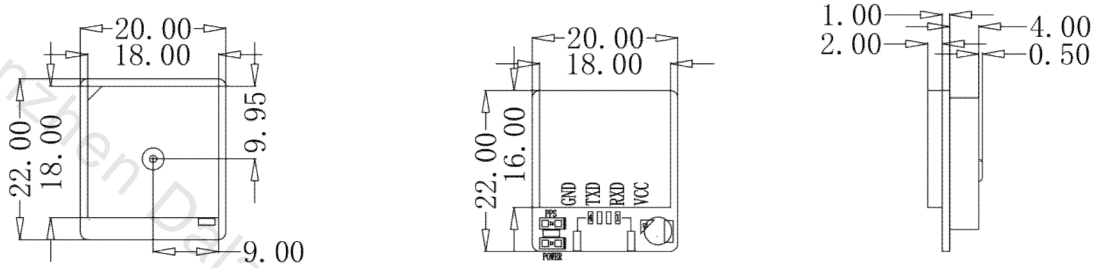


Figure 2 Dimensional drawing (unit: mm)

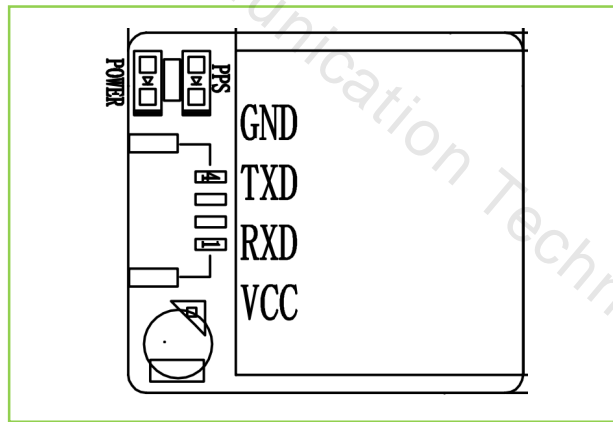


Table 1 Interface Definition

| PIN name | describe |
|----------|----------------------------------|
| VCC | Power input, DC+5V |
| RXD | GPS serial input, 3.3V TTL |
| TXD | GPS serial port output, 3.3V TTL |
| GND | GND |

4 Specification parameters

In this chapter, we will provide a detailed list and explanation of the product chip characteristics, sensitivity, accuracy, working principle, and other technical details, as shown in Table 2.

Table 2 Product Specification Parameters

| Specification parameters | | | |
|--------------------------|----|------------------------------|--|
| Chip characteristics | 1 | chip | UBX-M9140 |
| | 2 | Signal channel | 92-channel |
| | 3 | working frequency | GPS: L1 C/A, QZSS: L1 C/A/S, GLONASS: L10F, BeiDou: B1I, Galileo: E1B/C , SBAS L1 C/A: WAAS, EGNOS, MSAS, GAGAN |
| | 4 | Time pulse frequency | 0.25Hz-25Hz(default 1Hz) |
| | 5 | Time pulse signal accuracy | RMS: 30ns 99% : 60ns |
| | 6 | Horizontal position accuracy | 1.5m CEP (with SBAS) 2.5m CEP (without SBAS) |
| | 7 | Start Time | Cold start: 24 seconds Warm start: 2s Hot start: 2s |
| | 8 | sensitivity | Tracking:- 167 dBm Re capture:- 160 dBm Cold start:- 148 dBm Hot start:- 159 dBm |
| | 9 | Speed accuracy | 0.05m/s |
| | 10 | Baud rate | 38400bps (default) [Optional: 4800-921600] |

| | | | |
|--------------------------------|----|-------------------------|--|
| | 11 | Output Protocol | NMEA-0183、RTCM 3.3、UBX |
| | 12 | Output level | TTL |
| | 13 | Extreme working state | Gravity acceleration limit: 4g Height limit: 80,000m Speed limit: 500m/s |
| Antenna characteristics | 1 | Antenna specifications | 18*18*4 |
| | 2 | Maximum gain of antenna | 2.5dBi |
| | 3 | Polarization mode | RHCP |
| | 4 | Noise coefficient | ≤0.8dB |
| | 5 | LNA gain | L1: 20±2dB |
| Working characteristics | 1 | working voltage | 3V-5.5V DC(Typical value: 5.0v) |
| | 2 | power waste | <100mW @5V |
| | 3 | size | 20*22*7.5mm |
| | 4 | weight | 8.6g |
| | 5 | Connector | GH1.25 4pin |
| | 6 | working temperature | -35°C-75°C |
| | 7 | Storage temperature | -40°C-85°C |

5 Product physical picture

In this chapter, we will present real-life photos of the product, as shown in Figure 3. Through these pictures, you can see our products from different angles and details. We believe that through authentic display, we can better convey the value and philosophy of the product, thereby enhancing your trust and satisfaction with the product.

